


# HAND VANE SHEAR APPARATUS

Code : T175

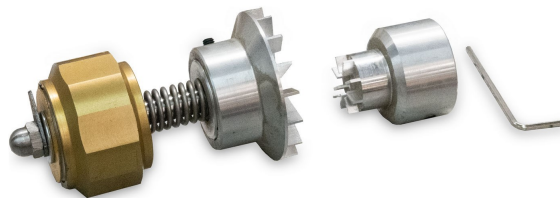

- The Hand Vane Shear Apparatus is used for rapid in-situ determination of the undrained shear strength of cohesive soils. This portable device is essential for geotechnical engineers conducting field investigations, particularly in shallow excavations and boreholes.
- The apparatus operates by inserting a vane into the soil and applying torque until shear failure occurs. The resistance to rotation is measured, providing a direct assessment of the soil's shear strength without the need for sample extraction.
- Equipped with interchangeable vane adaptors, the device accommodates a range of soil strengths, from very soft to stiff clays. This versatility ensures accurate measurements across diverse site conditions.
- The compact and lightweight design facilitates ease of transport and operation, making it suitable for both field and laboratory settings. Its straightforward mechanism allows for quick deployment and reliable results.
- When used in conjunction with other soil classification tests, the Hand Vane Shear Apparatus contributes to a comprehensive understanding of soil behavior, informing design decisions for foundations, slopes, and earthworks.

## **TECHNICAL SPECIFICATIONS**

- Measuring range:
  - Sensitive: 0–2 N/cm<sup>2</sup> (0–20 kPa)
  - Standard: 0–10 N/cm<sup>2</sup> (0–100 kPa)
  - High Capacity: 0–25 N/cm<sup>2</sup> (0–250 kPa)
- Torque measurement: Direct reading scale with maximum reading indicator

## **SUPPLIED WITH**

- Vane adaptor (Sensitive: 0–2 N/cm<sup>2</sup>)
- Vane adaptor (Standard: 0–10 N/cm<sup>2</sup>)
- Vane adaptor (High Capacity: 0–25 N/cm<sup>2</sup>)

## **ORDERING INFORMATION**

| Item                                              | Code      |
|---------------------------------------------------|-----------|
| HAND-VANE SHEAR APPARATUS                         | T175X00XH |
| VANE ADAPTOR for T175 (0 - 2 N/cm <sup>2</sup> )  | T175P001H |
| VANE ADAPTOR for T175 (0 - 10 N/cm <sup>2</sup> ) | T175P002H |
| VANE ADAPTOR for T175 (0 - 25 N/cm <sup>2</sup> ) | T175P003H |